

why **2** in **1** ?

PRIMER
(ETCHING PRIMER)

Improve Adhesion



TOP COAT
(SYNTHETIC PAINT)

Weather Resistant
Good Color Retention



Good Adhesion

Anti-corrosion | Weather Resistant

Good Color Retention

propan
The Paint Specialist

SENGKOTE

WATERBASED ANTI CORROSION PAINT

**SUITABLE TO METAL GALVANIZED,
ZINC AND LIGHT STEEL**



propan
The Paint Specialist



Certificate ID03/0111



Certificate ID11/1102954057



www.propanraya.com



Propan Raya ICC



@propanraya



08111 381 686





SENGKOTE is waterbased anti-corrosion paint for metal galvanized / zinc / metal and contain anti-corrosion pigment, can be applied to old and new metal galvanized / zinc.

2 in 1 Primer & Top Coat	Without Primer Coat in Metal Economically and efficient	Anti-Corrosion Corrosion resistant
Weather Resistant Exterior & interior	Water Based Environmentally friendly	Thousands Color Can be tinted



— Application Method —



- 1 Clean the substrate from rust, dust, oil and other impurities until it clean.

METAL GALVANIZED




Old

New

- 2 Stir SENGKOTE thoroughly using clean water (5-15%) according by the application tool. Apply until evenly distributed throughout the surface and allow to dry.

METAL GALVANIZED

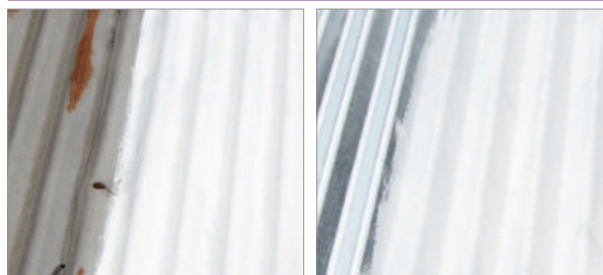


Old

New

- 3 After full dry, follow by second coat. Re-coating interval: minimum 3-4 hours (30°C).

— Application Area —

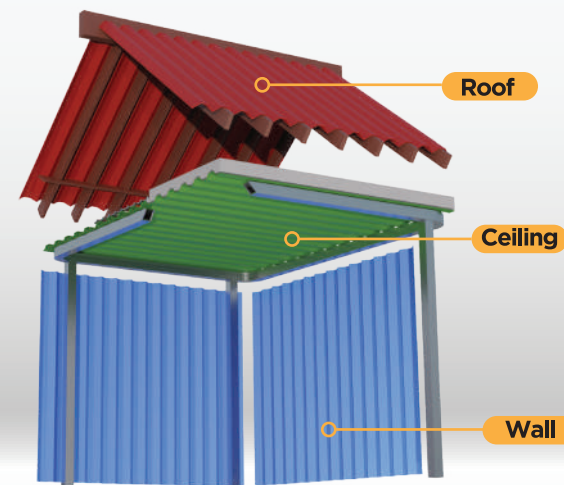

— Ready Mix Colors —

 RED OXIDE - 3426	 COOL BLUE - 6433	 GREY - 9113
 RICH BROWN - 3425	 ROOF GREEN - 7426	 BLACK - 9406

Available **WHITE - 9101**

— Technical Data —

Application method	Brush / roll	Air spray
Thinning ratio	5%	15%
Thinner	Clean water	
Recoating interval	Minimum 3 - 4 hours (30°C)	
Specific gravity	1,20 g/cc	
Gloss level	Dof	
Theoretical coverage	6 - 8 m ² /kg (1 layer)	
Packaging	1 Kg, 4 Kg and 20 Kg	